



INSTRUCTION SHEET 07218

Part #: 922C
Description: STCII/SCZ-48/52 Hitch Installation
Date: 10/20/2016

Instructions for Installing the STCII/SCZ-48/52 Hitch

1. Prepare the machine so there is easy and safe access to the work area. Remove the ignition key and disconnect the spark plug wires. Maintain all safety related work procedures. Always wear eye and hand protection.
2. Remove the center bolt and serrated flange nut securing the skid plate to the rear bumper. See Figure 1. Discard original hardware.
3. Install the hitch to the center bolt hole using (1) one 3/8-16 x 1-1/4" hex head bolt, (1) 3/8" flatwasher and (1) one 3/8-16 elastic stop nut supplied with this kit. See Figure 1. Tighten hardware securely.
4. At the time of delivery, operational and safety instructions of this accessory should be explained thoroughly to the customer. See STCII/SCZ Operator's Manual for details.

DANGER:

To avoid injury from burns, allow the mower to cool before removing the hardware and installing the hitch.

WARNING

MAXIMUM TOWED WEIGHT
NOT TO EXCEED 250 LBS
DO NOT CARRY PASSENGERS



READ THE OPERATOR'S MANUAL

483396

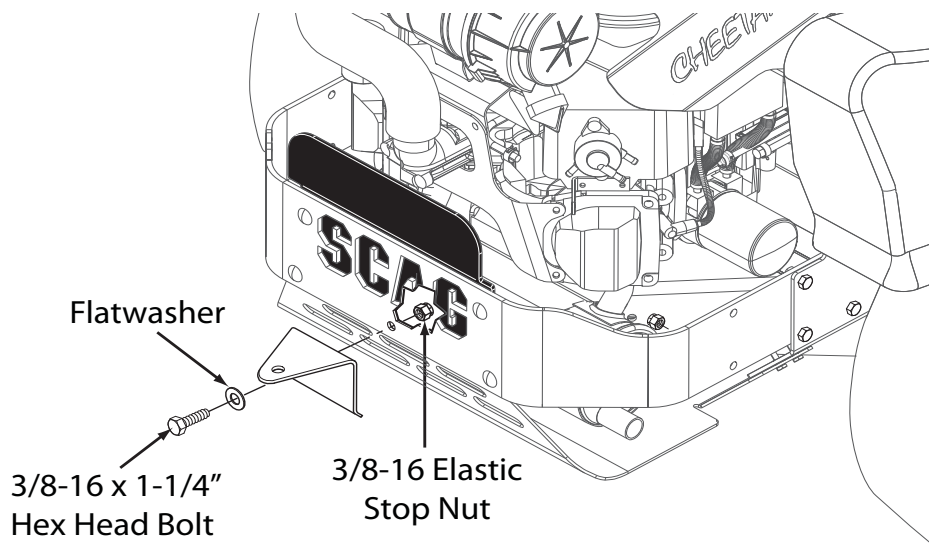


Figure 1. STCII/SCZ-48/52 Hitch Mounting