

Part #:	922X
Description:	SZL Deck Latch Installation
Date:	12/30/2015

Instructions for Installation of the 922X Deck Latch Accessory for SZL Models

1. Prepare the machine so there is easy and safe access to the work area. Remove the ignition key and disconnect the battery cables from the battery. Be sure to remove the negative (black) cable first followed by the positive (red) cable. Maintain all safety related work procedures. Always wear eye and hand protection.
2. Allow the engine and exhaust to completely cool before starting this installation.
3. Identify the Right Hand Deck Lift Link and locate the mounting hole provided. See Figure 1.

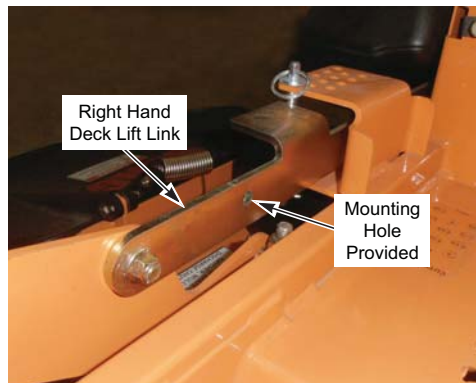


Figure 1. Locate Mounting Hole

4. Assemble the deck latch lever onto the right hand deck lift link with the bushing as shown and secure using the 3/8-16 x 1-1/4" hex head bolt and 3/8-16 elastic stop nut supplied with the kit. Do not over-tighten the mounting hardware. The deck latch lever must move freely. See Figure 2.

- NOTE -

When installed properly the deck latch lever will rest on top of the bottom deck height bracket as shown

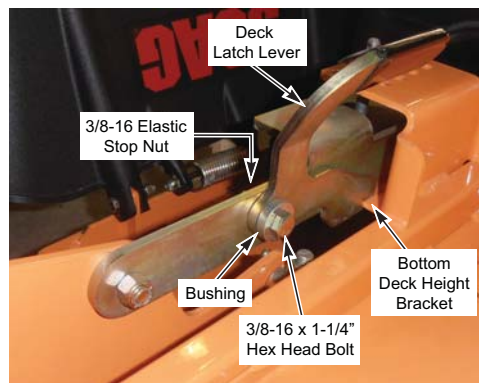


Figure 2. Operate Latch

5. Test the operation of this accessory to confirm that it is functioning properly by raising the deck to the transport position. The notch provided in the latch lever should engage the bottom deck height bracket identified in Figure 2.

To release the cutter deck from the transport position, push the cutter deck lift pedal forward and lift up on the cutter deck latch lever to lower the cutter deck.

6. Reconnect the battery cables to the battery making sure to connect the positive (red) cable first followed by the negative (black) cable.